

EX BayXP ZONE 21/22

The bar just got raised.

Our flagship high output LED High Bay now available in an EX version able to tackle zone 21 and 22 and standard IP65 rating and the ability (on request) to take on temperatures of up to 65°C ambient.

Ex tb IIIC T85°C Db IP65
MASC S/20-2180X



EX
IP 65

SPEC SHEET

EX BayXP 102

Effective Lumen:	8258 lm	12936 lm	15196 lm
240V:	59W	92W	126W
Power Factor:	0.96	0.96	0.96
mA:	450	700	900
Efficacy:	139 lm/w	141 lm/w	121 lm/w
Max Ta:	55°C	45°C	40°C
L&B:	L80 B10 55°C 60K hrs	L80 B20 45°C 60K hrs	L80 B50 40°C 60K hrs

Fitting Size: **24mm x 100mm x 700mm**

4kv
kV Protection:
 Up to 4kV, 10kV on request

KELVIN
5000K standard
 3000K, 4000K, 6500K available
 CR>80 R9>13

IP 65
IP Rating:
 Indoor

Modular:
 Expandable system

IK08/5J
Impact Resistance:
 IK08/5J

PC
Housing Diffuser:
 Polycarbonate

Al stainless SS316
Construction & Fasteners:
 Aluminum & SS316

Optional:
 Bluetooth, Wifi, Dali & Bi Level

P2000 Claw


Shackle

P2000 Claw

Shackle

KEY FEATURES


- **Modular**
with extra Lumen Packages up to 160 000lm.
- **Lenses**
4 different optics for countless optic combinations
- **3 Size Options**
EX Bay XP 102, EX Bay XP 103, EX Bay XP 104
- **Optics**
Impact rating IK08/5J
- **Temperature**
Ambient room temperature -25°C to +40°C up to +55°C on request
- **IP65**
For multiple environments
- **Mounting Options**
P2000 Trunking and Pendant

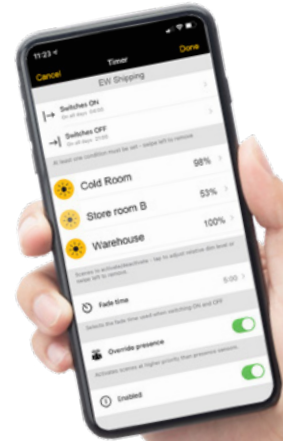

Optional:
 Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



4 Distribution Options

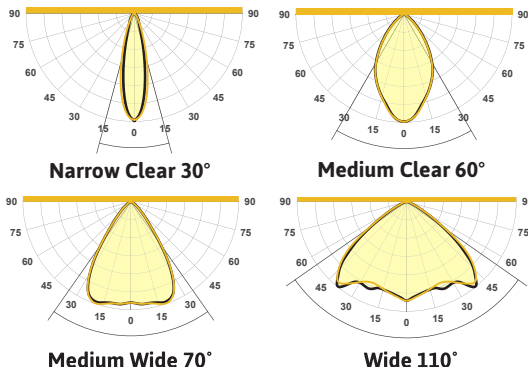

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhuesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

