


# RetroFit 22

## Turning old tech inside out

Our LED retrofit kit for the industry 22 Bulkhead features an integrated external heat sink that allows you to retain your existing cabling and body and reach a higher output than competing LED retrofit options. It comes standard with L80 B10 and up to 70 000hrs lifespan as well as an impressive CR80+.

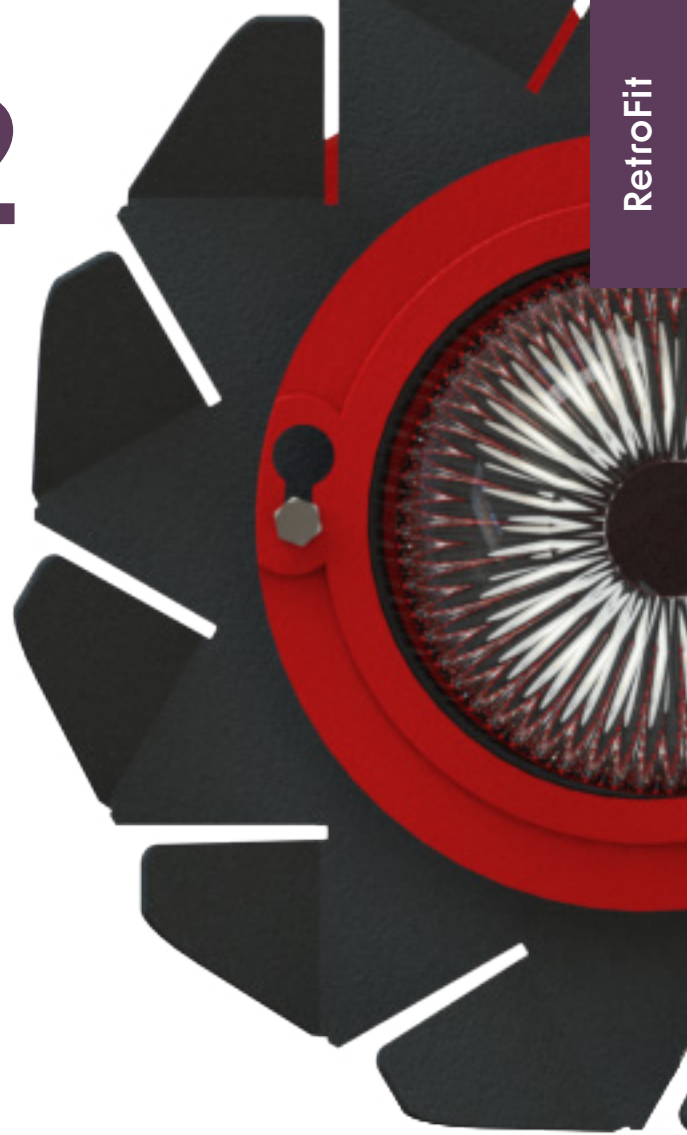

### SPEC SHEET RetroFit 22

	101	102	103
Effective Lumen:	9500 lm	15 434 lm	19 464 lm
<b>240V:</b> Efficacy:	<b>79W</b> 120 lm/w	<b>112W</b> 135 lm/w	<b>142W</b> 136 lm/w
<b>Max Ta:</b> L&B:	<b>30°C</b> L90 B10 50 000Hrs	<b>30°C</b> L90 B10 60 000Hrs	<b>30°C</b> L90 B10 65 000Hrs

Size **379 x 379 x 500mm**



Fully Serviceable




**5000K standard**  
3000K, 4000K,  
6500K available  
CR>80 R9>13



IP Rating:  
Indoor

This Retrofit fits into the common round glass industrial bulkheads well known within the industrial community.

### Mars 22 Distribution Options

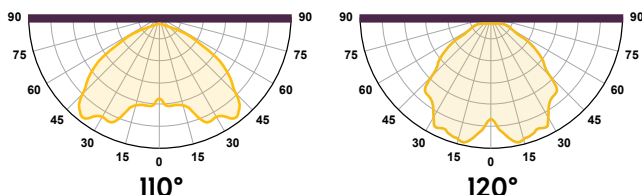

### KEY FEATURES

- **3 lumen Options**  
RetroFit 101, 102, 103

Each option has been designed and tested to ensure reliable performance at ambient temperatures up to 35°C. Utilising a patented (Patent no. 2015/03083) heat sink design which exhausts heat outside of the fitting whilst maintaining the IP rating of the bulkhead.



Designed and  
Manufactured by

**energywise**

Better Light  
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

Registered Patent  
South Africa 2015/03083

