

# Torch

## Marine grade, Industrial spec, Die hard.

Our LED bulkhead is composed of LM6 marine-grade high-pressure die-cast body and clear polycarbonate diffuser all wrapped up with an IP65 rating and able to withstand temperatures of 40 degrees ambient. Available in 4 different light distributions and standard with a replaceable 10kV surge protection and a high system efficacy of up to 128 lm/w.

### SPEC SHEET

### Torch

Effective Lumen up to:	8560 lm
<b>240V:</b> Efficacy:	<b>67W</b> <b>128 lm/w</b>
<b>Max Ta:</b> L&B:	<b>40°C</b> <b>L80 B10</b> <b>40°C 60K hrs</b>

Fitting Size:

**400 x 280 x 115mm**



**kV Protection:**  
Up to 10kV standard



**KELVIN**  
**Colour Temp:**  
5600K  
CR>80 R9>13



**IP 65**  
**Indoor & Outdoor**



**Front cover:**  
IK08/5J



**Construction & Fasteners:**  
Aluminum & SS316



**LM6 Marine Grade Cast Aluminum**

### KEY FEATURES

#### LENSES

- 4 different optics.

#### FRONT COVER

- Impact rating IK08/5J

#### TEMPERATURE


- Ambient room temperature -25°C to +40°C.

#### MOUNTING OPTIONS

- Surface mounting brackets
- Pole mount
- Pole mount with swivel



### 4 Distribution Options

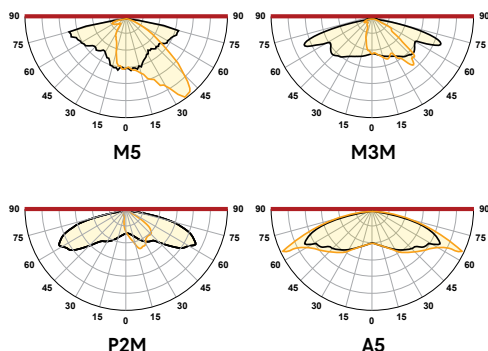

Designed and  
Manufactured by

**energywise**

Better Light  
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhumbesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

