

Bay XL

Versatility in a robust package

Fully serviceable, high-powered LED Highbays designed for commercial as well as light and heavy industrial applications. With a unique modular platform allowing extreme versatility of configuration. Bay XL's are made standard with an IP40 rating as well as built-in 4kV surge protection (upgradeable with a replaceable 10kV module).



SPEC SHEET

Bay XL 104


Raw lumen	14376 lm	16968 lm
Effective Lumen:	13196 lm	15064 lm
240V:	94W	113W
Raw Efficacy:	153 lm/w	150 lm/w
Effective Efficacy:	140 lm/w	133 lm/w
Max ambient:	40°C	30°C
L&B:	L80 B10 50K hrs	L80 B10 50K hrs

1200 mm

See our full brochure for other sizes and specifications.

4kV kV Protection: Up to 4kV surge protection	KELVIN 5000K standard 3000K, 4000K, 6500K available CR>80 R9>13	IP 40 IP Rating: Indoor	Modular: Expandable system
IK08/5J Impact Resistance: IK08/5J	Lenses	Plug & Play	Optional: Bluetooth, Wifi, Dali & Bi Level

4 Distribution Options

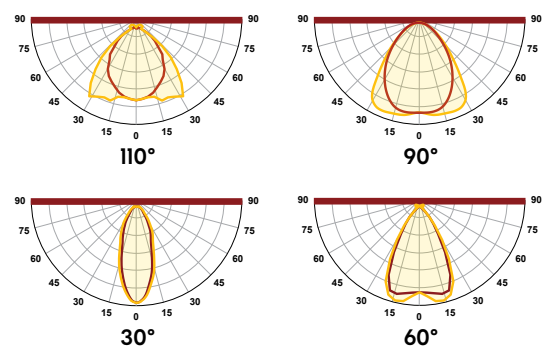

QMS-BXL-EWSP-240315

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 37 000 lm.

LENSES

- 4 different optics for countless optic combinations

5 SIZE OPTIONS


- Bay XL 102
- Bay XL 103
- Bay XL 104
- Bay XL 105

OPTICS

- Impact rating IK08/5J

MOUNTING OPTIONS

- P2000 mount
- Ceiling mount
- Suspended / Pendant

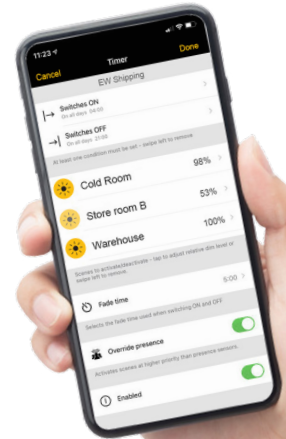

Optional:
Bluetooth, Wifi,
Dali & Bi Level.
Casambi App
featured above.



*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

Designed and Manufactured by



Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za | T: +27 31 764 2345
Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road,
Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640

