## EAR

SPECIFICATIONS

PPF (400-800nm) Input Power Lens Attributes Lens Ability

Product Sizes

Product Ability

Thermal Management

Dimming Control Power Plug

Lifetime Rating

**Electronic Components** 

**Company Certifications** 


Extra Component (not supplied)


Power Factor


Warranty

Suggested mounting height



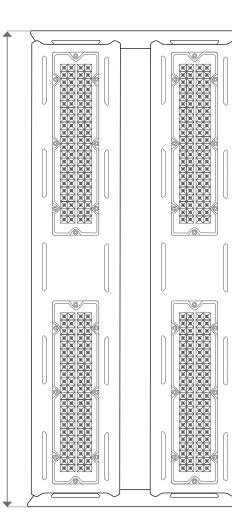









**Better Light** Through Research.

sales@energywise.co.za | www.energywise.co.za T: +27 31 764 2345 Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017 Postal address: PO Box 1166, Kloof, South Africa, 3640

SABS

0.3*:1) 472 μmol/s / (0.4*:1) 486 μmol/s / (1.5:1) 512 μmol
280W- 304W spectrum dependar
IP65/ IK08 impact ratir
110° optical distribution (st
Allows for full design intensity at 0.5m distance
between plants and lights and higher than norm
intensities at this distance when compared to no ler
AxisPRO: 1000mm (I) x 70mm (w) x 55mm (I
PLATE: single plate 360mm (I) x 120mm (w) x 50mm (I
Minimum 500mm above the heighest crop canop
position- stationary installation
1000 μmol/m2 /s @ 500mm @ ± 500W/m
500 μmol/m2 /s @ 500mm @ ± 300W/m
Passive coolir
DALI2 protocol / 1- 100
IP65 5-pole connector plug attached to fitting (partne
panel mount plug in the bo
L90B10, 45 000 hrs @ 35°

L90B10, 45 000 hrs @ 35°C > 0,95

Driver- EU Tridonic LED- EU Vossloh Schwabe 5 year standard warranty

ISO 9001 / SABS Bench Mark / GMP

Power & Control Distribution box 3-8 way

## SPECTRUMS

Earth<sup>™</sup> 1.5:1 Spectrum With a Blue rich spectrum ideal for vegetative growth and propagation


Earth™ 0.3\*:1 Spectrum with Far Red- Speciality horticulture spectrum- very red rich for flowering.

Earth<sup>™</sup> 0.4<sup>+</sup>:1 Spectrum A well mixed spectrum full of blue and red with far red to give your plants a great environment for growth



energyw

ISO**9001** 



4kV, Upgrade to 10kV surge

protection available





**IK08/5**J

Dimmable DALI standard, non dimmable on request.

distribution options (lenses)

Impact resistant

4 different light

lens (IK08)

Plug and play ability to service your fittings without an electrician



QMS-EAAX-EWSP-240322