

# LEDrail 1000

## Long, longer lasting lights.

Linear LED solution perfect for fluorescent replacements or elegant runs of continuous evenly distributed light. Easily suited to offices, retail or conference rooms thanks to the remote driver and the fitting's ability to be mounted floating, recessed or flush with your ceiling.



Retail

IP 40

### SPEC SHEET

### LEDrail 1000 104

### KEY FEATURES

Raw Lumen:	5840 lm	6888 lm	7872 lm
Effective Lumen:	4300 lm	4984 lm	5641 lm
<b>240V:</b>	<b>32W</b>	<b>41W</b>	<b>47W</b>
Raw Efficacy:	183 lm/w	167 lm/w	168 lm/w
Effective Efficacy:	134 lm/w	121 lm/w	121 lm/w
<b>Max Ta:</b>	<b>30°C</b>	<b>30°C</b>	<b>30°C</b>
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hrs

### 5 SIZE OPTIONS

- LEDrail 1000 104 1100mm
- LEDrail 1000106 1700mm
- LEDrail 1000 108 2300mm
- LEDrail 1000 110 2800mm
- LEDrail 1000 206 (double)

### MOUNTING OPTIONS

- Ceiling mount
- Floating mount
- Pendant mount

### MODULAR

- With extra Lumen Packages up to 16900 lm.

### HOUSING

- Frosted for a harmonious band of soft light.
- Clear.



**Optional:** Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



\*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

Fitting Length: **1150mm**

See our full brochure for other sizes and specifications.



**4kV Protection:** 1kV-2kV. 4kV or 10kV on request



**5000K standard** 3000K, 4000K, 6500K available CR>80 R9>13



**IP Rating:** Indoor



**Modular:** Expandable system



Recyclable



**Acrylic Diffuser**




**P2000 Mount**



**Optional:** Bluetooth, Wifi, Dali & Bi Level

Distribution

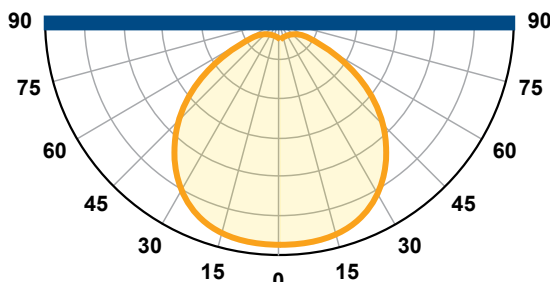

**120° Diffuser**

Designed and Manufactured by

**energywise**

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za  
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

