

LEDrail 8000

Aesthetically crisp & professionally elegant.

In design sometimes less is more, and that is certainly true for the clean lines of the Ledrail 8000. This luminaire's driver and power management system is all housed within the fitting giving it a sleek profile.

Retail
IP 40

Built in Driver



SPEC SHEET

LEDrail 8000 108

Raw Lumen:	10920 lm	12700 lm	15120 lm
Effective Lumen:	7520 lm	8800 lm	10560 lm
240V:	66W	81W	96W
Raw Efficacy:	166 lm/w	157 lm/w	158 lm/w
Effective Efficacy:	114 lm/w	109 lm/w	110 lm/w
Max Ta:	40°C	40°C	40°C
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hrs

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 11200 lm.

5 SIZE OPTIONS


- LEDrail 8000 104
- LEDrail 8000 105
- LEDrail 8000 106
- LEDrail 8000 107
- LEDrail 8000 108

OPTICS

- Infinity diffuser for a continuous band of light

MOUNTING OPTIONS

- Ceiling Mount
- Floating
- Pendant

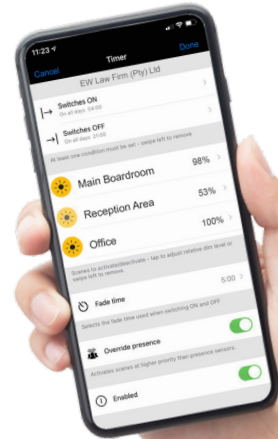






Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



Fitting length: **2280mm**

 kV Protection: 1kV-2kV. 4kV or 10kV on request	 5000K standard 3000K, 4000K, 6500K available CR>80 R9>13	 IP Rating: Indoor	 Colour Options: White, Anodised & Black
---	--	--	--

 Recyclable	 Housing Diffuser: Polycarbonate	 Suspended/Pendant Mount	 Optional: Bluetooth, Wifi, Dali & Bi Level
--	--	---	---

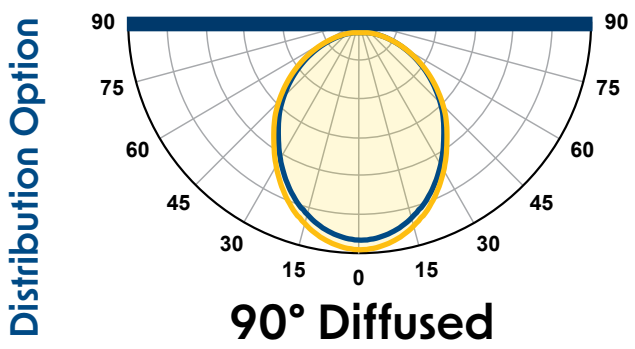

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640

*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

5 year warranty:
Please visit
www.energywise.co.za

