



LINEAR

# DLBR-LED 4-300 (40x52)



AVAILABLE IN TUNEABLE WHITE

## Sleek and modern

The DLBR-LED 4-300 exemplifies contemporary design, making it a stylish and functional addition to any modern space. This light fitting is not only a source of illumination but also a sophisticated piece that enhances the aesthetic appeal of the environment.

### Main benefits:

The top-mounted driver casing can benefit from better natural convection currents, aiding in the dissipation of heat. Effective cooling is crucial for the longevity and performance of the driver, and a top position help achieve this.

**Areas of use:** office spaces, retail environments, galleries, architectural applications and corridors.


	CRI	80+/90+
Room temp (Ta)		30°C
Optic		Lens
IP rating		40
UGR rating		<16
Dimensions HxW		40mmx52mm
Lens availability		65° or 90° or Asym
Lifetime		60 000 hrs
Raw efficacy		Up to 205 lm/w



**Optimised UGR:**  
Efficient optics, provide very low glare



**High CLC:**  
Optics with constant light colour

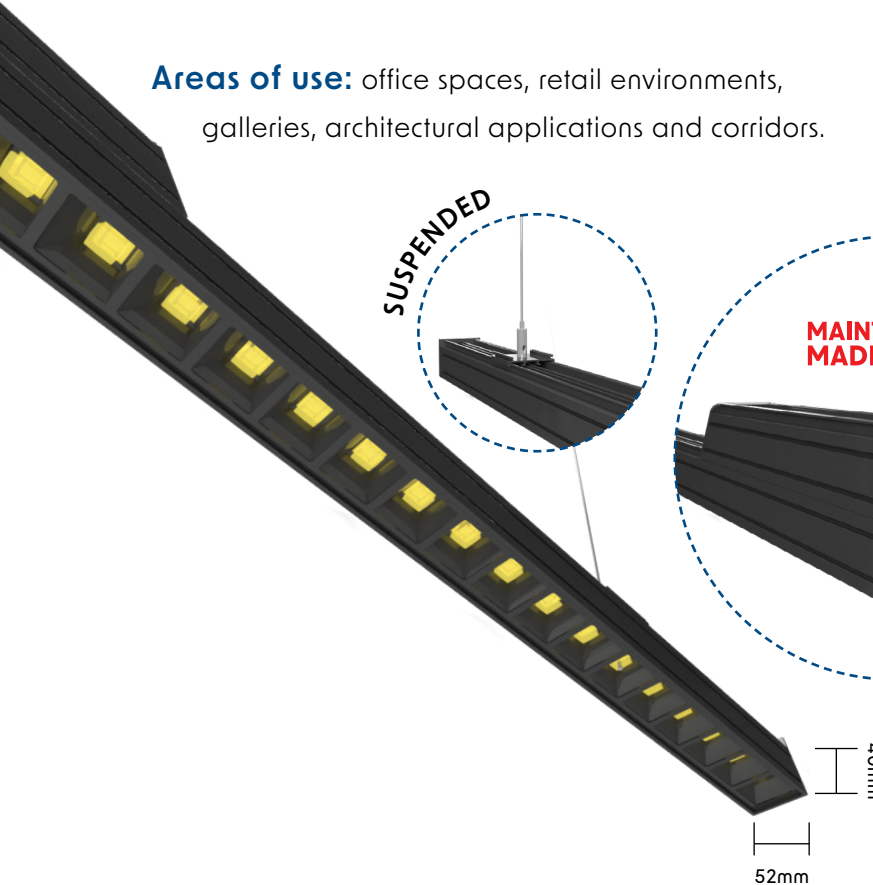

SUSPENDED

MAINTENANCE MADE SIMPLE

## quick and easy!

Top-mounted driver casing allows for swift maintenance in the event of repair or replacement.

## reduced costs!

Faster and easier maintenance translates to lower labour costs and less operational downtime, contributing to overall cost savings.



Available in Black & White

### KELVINS & CRI OPTIONS

CRI >95	3000K	4000K	5000K	6500K
CRI >80	3000K	4000K	5000K	6500K

We offer a variety of options and configurations to suit your needs. Our team can customize solutions based on your specific requests. Feel free to get in touch with us to discuss the available options.