

HIGHbay XF

Highpower commercial highbay designed to out spec, outperform and outlast the competition.



Industrial

IP 20



HIGHbay XF 104

Raw Lumen:	4240 lm	5840 lm
Effective Lumen:	3720 lm	5062 lm
240V:	24W	34W
Raw Efficacy:	180 lm/w	174 lm/w
Effective Efficacy:	158 lm/w	151 lm/w
Max ambient:	30°C	30°C
L&B:	L80 B10 50K Hrs	L80 B10 50K Hrs

1250 mm

Other sizes, lenses, drivers and wattages available. Call or email for full brochure and prices.

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 21700 lm.

LENSES

- 4 different optics for countless optic combinations

3 SIZE OPTIONS


- HIGHbay XF 104 1250mm
- HIGHbay XF 204 1250mm
- HIGHbay XF 304 1250mm

OPTICS

- Impact rating IK08/5J

MOUNTING OPTIONS

- P2000 mount
- Ceiling mount
- Suspended / Pendant

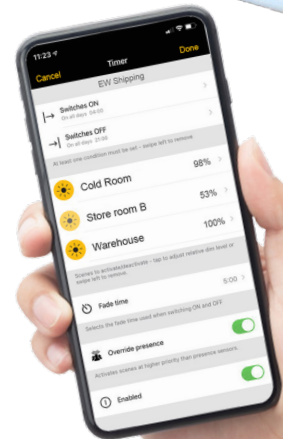

Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za | T: +27 31 764 2345
Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640

5 year warranty:
Please visit www.energywise.co.za



4 Distribution Options



kV Protection:
Up to 4kV



5000K standard
3000K, 4000K, 6500K available
CR>80 R9>13



IP Rating:
Indoor




Impact Resistance:
IK08/5J



Lenses




Optional:
Bluetooth, Wifi, Dali & Bi Level




P2000 Mount




Shackle / Pendant

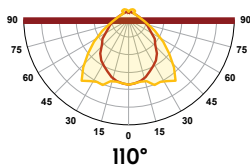


110°

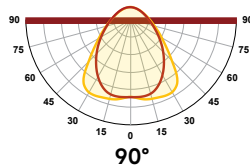

90°

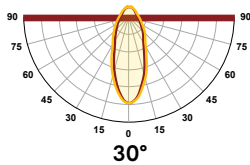

30°

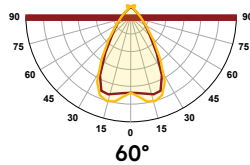

60°

QMS-BXF-EWSP-240830