

LEDrail 4000

Retail
IP 40

Discreet, sleek but far from meek.

The ideal high powered solution to your linear LED solutions. Designed for recessed or pendent applications such as boardrooms, passages and offices the ledrail 4000 is customisable to any room size offering sleek lines and great distribution.



SPEC SHEET

LEDrail 4000 110

Raw Lumen:	10000lm	13650lm	15875lm
Effective Lumen:	6710 lm	9400 lm	11000 lm
240V:	60W	83W	101W
Raw Efficacy:	167 lm/w	166 lm/w	157 lm/w
Effective Efficacy:	112 lm/w	114 lm/w	109 lm/w
Max Ta:	40°C	40°C	40°C
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hr

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 6600 lm.

5 SIZE OPTIONS


- LEDrail 4000 104
- LEDrail 4000 105
- LEDrail 4000 106
- LEDrail 4000 107
- LEDrail 4000 108

OPTICS

- Infinity diffuser for a continuous band of light

MOUNTING OPTIONS

- Recessed
- Ceiling mount
- Floating
- Pendant

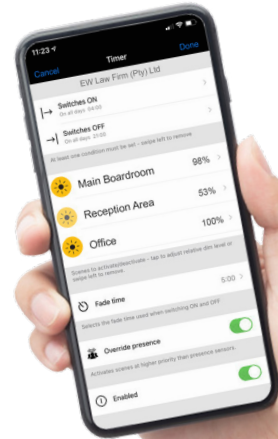

Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



Fitting length: **2800mm**

kV
kV Protection: 1kV-2kV. 4kV or 10kV on request

KELVIN
5000K standard
3000K, 4000K, 6500K available
CR>80 R9>13

IP 40
IP Rating: Indoor

Colour Options:
White, Anodised & Black




Recyclable

PMMA
Housing Diffuser: Polycarbonate

Suspended/Pendant Mount

Optional: Bluetooth, Wifi, Dali & Bi Level

Distribution Option

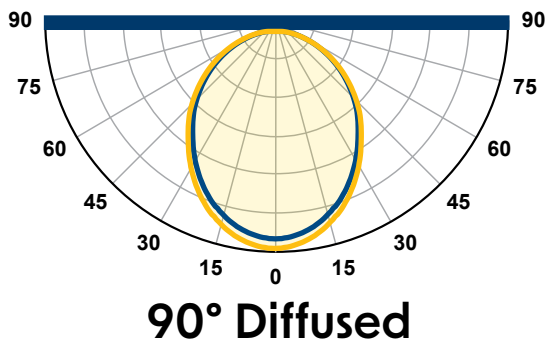

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640

*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

5 year warranty:
Please visit www.energywise.co.za



QMS-LR40-EWSP-240830