

Bay XE

No frills, all punch, no compromises.

A high powered and high quality highbay in an economical packaging, the Bay XE packs much of the punch of its more luxurious Bay XL and XP siblings without the frills. A true no nonsense workhorse this the BAY XE was designed to light where you need it without fuss.



SPEC SHEET Bay XE

	103	104
Raw Lumen:	22,660 lm	45,320 lm
Effective Lumen:	18,822 lm	37,340 lm
240V:	144W	287W
Raw Efficacy:	158 lm/w	158 lm/w
Effective Efficacy:	131 lm/w	130 lm/w
Max Ta:	30°C	30°C
L&B:	L80 B10	L80 B10
	50K hrs	50K hrs
Fitting Size:	1000 mm	1350 mm

KEY FEATURES

LENSES

- 3 different optics for multiple lens combinations.

3 SIZE OPTIONS

- Bay XE 102
- Bay XE 103
- Bay XE 104

OPTICS

- Impact rating IK08/5J

MOUNTING OPTIONS

- P2000 mount
- Suspended / Pendant



P2000 Mount



Shackle / Pendant



4kv
kV Protection:
 4kV surge protection

KELVIN
5000K standard
 3000K, 4000K, 6500K available
 CR>80 R9>13

IP 20
IP Rating:
 Indoor

IK08/5J
Impact Resistance:
 IK08/5J

AL
Lenses:
 4 Options


AL
Construction & Fasteners:
 Aluminum & SS306



5 year warranty:
 Please visit www.energywise.co.za

*25°C is for Textbooks, Not Africa's Sun:
 All EW Lights are designed for the 30°C Reality. Minimum.

4 Distribution Options

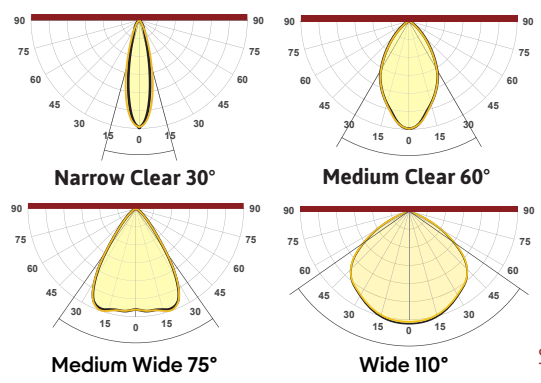

Designed and Manufactured by **energywise**

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za
 T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubesi Road, Riverhorse Valley, Durban, South Africa, 4017
 Postal address: PO Box 1166, Kloof, South Africa, 3640

See our full brochure for other sizes and specifications.

