

LEDrail 2000

P2000 Not included

P2000 LED conversion kit that's positively magnetic.

Designed specifically for slick and quick attachment to P2000 trunking thanks to its patented magnetic mounting plates the ledrail 2000 offers clean lines, cost effective installation and the ability to install in both continuous runs or staggered distributions with ease.



SPEC SHEET

LEDrail 2000 104

KEY FEATURES

Raw Lumen: 4240 lm
Effective Lumen: 3116 lm

5840 lm
4300 lm

6888 lm
4984 lm

240V:
Raw Efficacy: 177 lm/w
Effective Efficacy: 130 lm/w

32W
183 lm/w
134 lm/w

41W
167 lm/w
121 lm/w

Max Ta: 35°C
L&B: L80/90 B10
F10 70K hrs

35°C
L80/90 B10
F10 70K hrs

35°C
L80 B10
F10 70K hrs

Fitting Length: **1150mm**

See our full brochure for other sizes and specifications.

MODULAR

- With extra Lumen Packages up to 16900 lm.

DIFFUSER


- For a harmonious band of soft light.

5 SIZE OPTIONS

- LEDrail 2000 104
- LEDrail 2000 106
- LEDrail 2000 108
- LEDrail 2000 110
- LEDrail 2000 206 (double)

MOUNTING OPTIONS

- P2000 mount

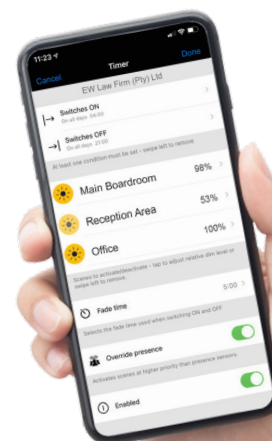

Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



*25°C is for Textbooks, Not Africa's Sun:
All EW Lights are designed for the 30°C Reality. Minimum.



kV Protection: 1kV-2kV. 4kV or 10kV on request



5000K standard 3000K, 4000K, 6500K available CR>80 R9>13



IP Rating: Indoor



Modular: Expandable system



Acrylic Diffuser




Recyclable



Optional: Bluetooth, Wifi, Dali & Bi Level

Distribution

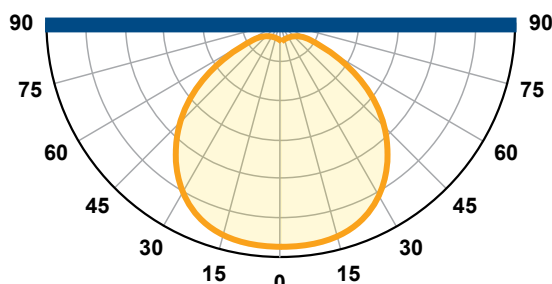

120° Diffuser

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubs Road, Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640

5 year warranty:
Please visit
www.energywise.co.za

