

EX Torch

Who says tough can't be pretty?

Our industrial LED bulkhead is composed of a marine-grade high-pressure die-cast aluminum body and clear polycarbonate cover all wrapped up with an IP65 rating and able to withstand temperatures of 40°C ambient. Available in 4 different light distributions and standard with a replaceable 10kV surge protection this luminaire is rated for zone 21 and zone 22.

ZONE
21/22

EX

IP
65



SPEC SHEET

EX Torch

Raw Lumen:	9912 lm
Effective Lumen:	9440 lm
Wattage:	67W
Power Factor:	0.95
Raw Efficacy:	148 lm/w
Effective Efficacy:	141 lm/w
Max Ta:	40°C
L&B:	L80 B10
Hrs:	60000K hrs

Fitting Size:

400mm x 280mm x 115mm



kV Protection:
Up to 10kV standard



5000K standard
4000K, 6500K available
CR>80 R9>13



Indoor & Outdoor



Front cover:
IK08/5J




Lenses:
Polycarbonate



LM6 Marine Grade Cast Aluminum

4 Distribution Options

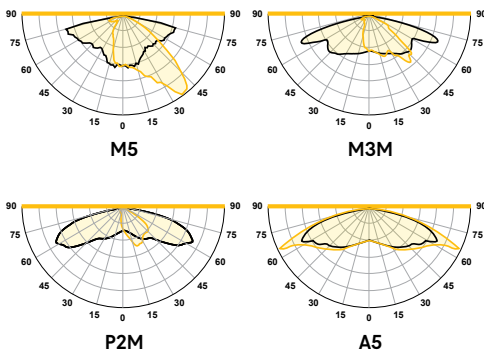

KEY FEATURES

LENSES

- 4 different optics.

FRONT COVER

- Impact rating IK08/5J

TEMPERATURE

- Ambient room temperature -25°C to +40°C.

MOUNTING OPTIONS

- Surface mounting brackets
- Swivel mounting bracket
- Extender 44 mounting bracket



Designed and
Manufactured by

energywise

Better Light
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhuhesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

*25°C is for Textbooks, Not Africa's Sun:
All EW Lights are designed for the 30°C Reality. Minimum.

QMS-EXT-EWSP-240819

