



Cheat sheet for the FROSTED OR CLEAR POD



kV Protection:
4kV Standard
10kV on request



5000K standard
3000K, 4000K,
6500K available
CR>80



**Indoor /
Outdoor**



**Impact
Resistance:**
IK08/5J



**Casing
Diffuser:**
Polycarbonate



L&B Rating
L90 B10
30 000 hrs



Mounting:
Suspended/
pendant

8 Different wattage, length & lumen options

LOW OUTPUT HIGH OUTPUT

Raw Lumen:	4410 lm	5150 lm
Effective Lumen:	3080 lm	3550 lm
Wattage:	25W	33W
Power Factor:	0.95	0.95
Raw Efficacy:	176 lm/w	157 lm/w
Effective Efficacy:	123 lm/w	108 lm/w
Max Ta:	35°C	35°C
L&B:	L90 B10 L80 B10	L80 B10
1420mm x 50mm		

POD 103

Raw Lumen:	5890 lm	6870 lm
Effective Lumen:	4100 lm	4730 lm
240V:	34W	44W
Power Factor:	0.95	0.95
Raw Efficacy:	176 lm/w	157 lm/w
Effective Efficacy:	123 lm/w	108 lm/w
Max Ta:	35°C	35°C
L&B:	L90 B10 L80 B10	L80 B10
1700mm x 50mm		

POD 104


Raw Lumen:	7360 lm	8590 lm
Effective Lumen:	5130 lm	5910 lm
240V:	42W	55W
Power Factor:	0.95	0.95
Raw Efficacy:	176 lm/w	157 lm/w
Effective Efficacy:	123 lm/w	108 lm/w
Max Ta:	35°C	35°C
L&B:	L90 B10 L80 B10	L80 B10
1980mm x 50mm		

POD 105

Raw Lumen:	8830 lm	10,300 lm
Effective Lumen:	6160 lm	7100 lm
240V:	50W	66W
Power Factor:	0.95	0.95
Raw Efficacy:	176 lm/w	157 lm/w
Effective Efficacy:	108 lm/w	108 lm/w
Max Ta:	35°C	35°C
L&B:	L90 B10 L80 B10	L80 B10
2260mm x 50mm		

POD 106

Distribution option

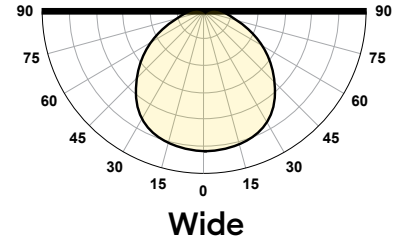

IP65 protection grade

FROSTED OR CLEAR DIFFUSER

