

Bay XE

No frills, all punch, no compromises.

A high powered and high quality highbay in an economical packaging, the Bay XE packs much of the punch of its more luxurious Bay XL and XP siblings without the frills. A true no nonsense workhorse this the BAY XE was designed to light where you need it without fuss.



Industrial

IP
20

SPEC SHEET

Bay XE

103

Raw Lumen:
Effective Lumen:

33,990 lm
27,255 lm

240V:
Raw Efficacy:
Effective Efficacy:

215W
158 lm/w
127 lm/w

Max Ta:
L&B:

30°C
L80 B10
50K hrs

Fitting Size:

1000 x 173mm

104

45,320 lm
37,340 lm

287W
158 lm/w
130 lm/w

30°C
L80 B10
50K hrs

1350 x 173mm



kV Protection:
4kV surge protection



5000K standard
3000K, 4000K,
6500K available
CR>80 R9>13



IP Rating:
Indoor



Impact Resistance:
IK08/5J



Lenses:
4 Options



Construction & Fasteners:
Aluminum & SS306

KEY FEATURES

LENSES

- 3 different optics for multiple lens combinations.

3 SIZE OPTIONS


- Bay XE 102
- Bay XE 103
- Bay XE 104

OPTICS

- Impact rating IK08/5J

MOUNTING OPTIONS

- P2000 mount
- Suspended / Pendant



P2000 Mount




Shackle / Pendant



5 year warranty:
Please visit
www.energywise.co.za

*25°C is for Textbooks, Not Africa's Sun:
All EW Lights are designed for the 30°C Reality. Minimum.

4 Distribution Options

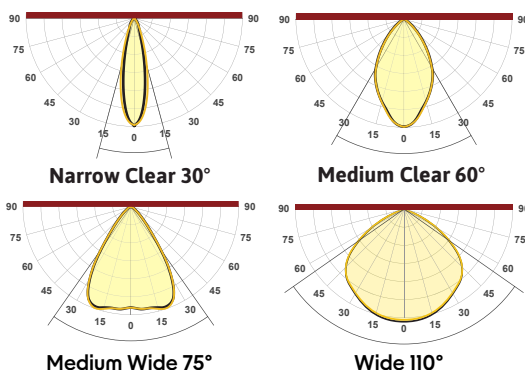

Designed and
Manufactured by

energywise®

Better Light
Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhuhesi Road, Riverhorse Valley, Durban, South Africa, 4017
Postal address: PO Box 1166, Kloof, South Africa, 3640



See our full brochure for other sizes and specifications.

QMS-BXE-EWSP-250311