

LEDrail 1000



Retail

IP 40

Long, longer lasting lights.

Linear LED solution perfect for fluorescent replacements or elegant runs of continuous evenly distributed light. Easily suited to offices, retail or conference rooms thanks to the remote driver and the fitting's ability to be mounted floating, recessed or flush with your ceiling.



SPEC SHEET

LEDrail 1000 104

KEY FEATURES

Raw Lumen:
Effective Lumen:

5840 lm
4300 lm

6888 lm
4984 lm

7872 lm
5641 lm

240V:

32W

41W

47W

Raw Efficacy:
Effective Efficacy:

183 lm/w
134 lm/w

167 lm/w
121 lm/w

168 lm/w
121 lm/w

Max Ta:

30°C

30°C

30°C

L&B:

L90 B10
F10 70K Hrs

L80 B10
F10 70K Hrs

L80 B10
F10 70K Hrs

5 SIZE OPTIONS

- LEDrail 1000 104 1100mm
- LEDrail 1000 106 1700mm
- LEDrail 1000 108 2300mm
- LEDrail 1000 110 2800mm
- LEDrail 1000 206 (double)

MOUNTING OPTIONS

- Ceiling mount
- Floating mount
- Pendant mount

MODULAR

- With extra Lumen Packages up to 16,900 lm.

HOUSING

- Frosted for a harmonious band of soft light.
- Clear.



Optional:
Bluetooth, Wifi,
Dali & Bi Level.
Casambi App
featured above.



Fitting Length: **1150 x 45mm**

See our full brochure for other sizes and specifications.



kV Protection:
1kV-2kV.
4kV or 10kV on request



5000K standard
3000K, 4000K,
6500K available
CR>80 R9>I3



IP Rating:
Indoor



Modular:
Expandable system



Recyclable



Acrylic Diffuser




P2000 Mount



Optional:
Bluetooth, Wifi,
Dali & Bi Level

Distribution

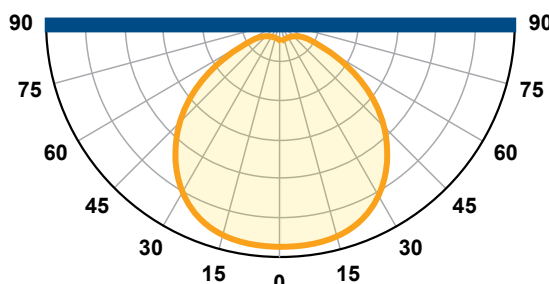

Wide Frosted

Designed and
Manufactured by

energywise

Better Light
Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhuesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

5 year warranty:

Please visit
www.energywise.co.za



SABS
APPROVED



MADE IN
SOUTH AFRICA