

LEDrail 4000



Retail

IP 40

Discreet, sleek but far from meek.

The ideal high powered solution to your linear LED solutions. Designed for recessed or pendent applications such as boardrooms, passages and offices the ledrail 4000 is customisable to any room size offering sleek lines and great distribution.



Remote Driver

SPEC SHEET

LEDrail 4000 110

Raw Lumen:	10,000 lm	13,650 lm	15,875 lm
Effective Lumen:	6710 lm	9400 lm	11,000 lm
240V:	60W	83W	101W
Raw Efficacy:	167 lm/w	166 lm/w	157 lm/w
Effective Efficacy:	112 lm/w	114 lm/w	109 lm/w
Max Ta:	40°C	40°C	40°C
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hrs

KEY FEATURES

MODULAR

- With extra Lumen Packages up to 13,200 lm.

5 SIZE OPTIONS


- LEDrail 4000 104
- LEDrail 4000 105
- LEDrail 4000 106
- LEDrail 4000 108
- LEDrail 4000 110

OPTICS

- Infinity diffuser for a continuous band of light

MOUNTING OPTIONS

- Recessed
- Ceiling mount
- Floating
- Pendant

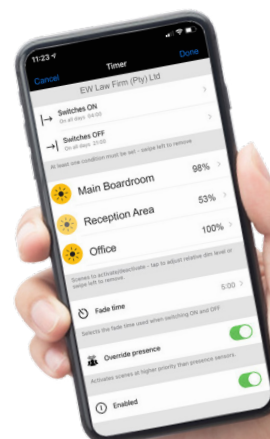

Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhumbesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

Dimensions: **2811mm x 51mm x 46mm**



kV Protection: 1kV-2kV. 4kV or 10kV on request



5000K standard 3000K, 4000K, 6500K available CR>80 R9>13



IP Rating: Indoor



Colour Options: White, Anodised & Black



Recyclable



Housing Diffuser: Polycarbonate




Suspended/Pendant Mount



Optional: Bluetooth, Wifi, Dali & Bi Level

Distribution Option

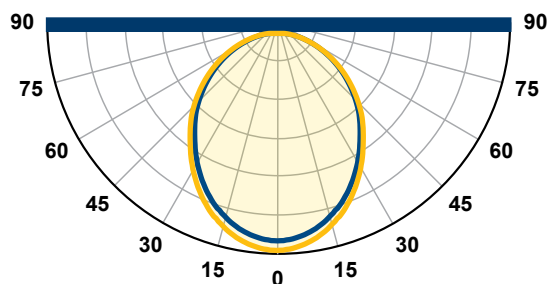

90° Diffused

*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 30°C Reality. Minimum.

5 year warranty:
Please visit
www.energywise.co.za



SABS APPROVED



MADE IN SOUTH AFRICA

QMS-LR40-EWSP-250327