

LEDrail 8000



Retail

IP 40

**Aesthetically crisp
& professionally
elegant.**

In design sometimes less is more, and that is certainly true for the clean lines of the Ledrail 8000. This luminaire's driver and power management system is all housed within the fitting giving it a sleek profile.

**Built in
Driver**

SPEC SHEET

LEDrail 8000 108

Raw Lumen:
Effective Lumen:

10,920 lm
7520 lm

12,700 lm
8800 lm

15,120 lm
10,560 lm

240V:
Raw Efficacy:
Effective Efficacy:

66W
166 lm/w
114 lm/w

81W
157 lm/w
109 lm/w

96W
158 lm/w
110 lm/w

Max Ta:
L&B:

40°C
L80/90 B10
F10 70K hrs

40°C
L80/90 B10
F10 70K hrs

40°C
L80 B10
F10 70K hrs

Dimensions:

2251mm x 51mm x 85mm



kV Protection:
1kV-2kV. 4kV or
10kV on request



5000K standard
3000K, 4000K,
6500K available
CR>80 R9>13



IP Rating:
Indoor



Colour Options:
White, Anodised
& Black



Recyclable



Housing Diffuser:
Polycarbonate



**Suspended/
Pendant Mount**



Optional:
Bluetooth, Wifi,
Dali & Bi Level

KEY FEATURES



MODULAR

- With extra Lumen Packages up to 13,200 lm.

6 SIZE OPTIONS


- LEDrail 8000 104
- LEDrail 8000 105
- LEDrail 8000 106
- LEDrail 8000 107
- LEDrail 8000 108
- LEDrail 8000 110

OPTICS

- Infinity diffuser for a continuous band of light

MOUNTING OPTIONS

- Ceiling Mount
- Floating
- Pendant

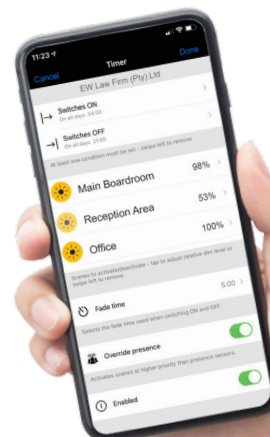

Optional:
Bluetooth, Wifi,
Dali & Bi Level.
Casambi App
featured above.



Designed and
Manufactured by

energywise


**Better Light
Through Research.**

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhumbesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

Distribution Option

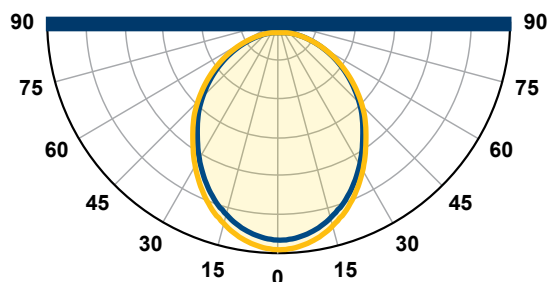

90° Diffused

*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 30°C Reality. Minimum.

5 year warranty:
Please visit
www.energywise.co.za



**SABS
APPROVED**



**MADE IN
SOUTH AFRICA**

QMS-LR80-EWSP-250327