

Torch

Marine grade, Industrial spec, Die hard.

Our LED bulkhead is composed of LM6 marine-grade high-pressure die-cast body and clear polycarbonate diffuser all wrapped up with an IP65 rating and able to withstand temperatures of 40 degrees ambient. Available in 4 different light distributions and standard with a replaceable 10kV surge protection and a high system efficacy of up to 128 lm/w.



Industrial

IP 65



SPEC SHEET

Torch

Raw Lumen up to: 10,560 lm
Effective Lumen up to: 8584 lm

Wattage: 67W
Raw Efficacy: 160 lm/w
Effective Efficacy: 130 lm/w

Max Ta: 45°C
L&B: L80 B10
45°C 60K hrs

KEY FEATURES

LENSES

- 4 different optics for multiple lens combinations.

FRONT COVER

- Impact rating IK08/5J

TEMPERATURE

- Ambient room temperature -25°C to +40°C.

MOUNTING OPTIONS

- Surface mounting brackets
- Pole mounting brackets
- Swivel mounting bracket
- Extender 44 mounting bracket

Fitting Size:

400 x 280 x 115mm



kV Protection:
Up to 10kV standard



KELVIN
Colour Temp:
5600K
CR>80 R9>13



Indoor & Outdoor



Front cover:
IK08/5J




Construction & Fasteners:
Aluminum & SS316



LM6 Marine Grade Cast Aluminum

4 Distribution Options

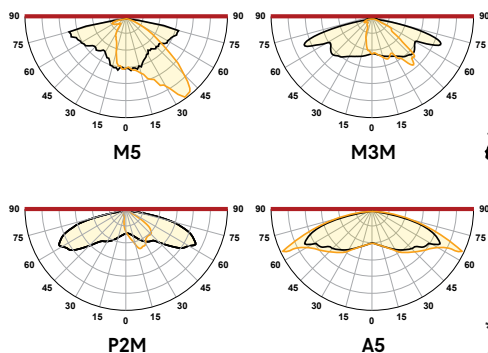

Designed and Manufactured by

energywise

Better Light
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhuesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

*25°C is for Textbooks, Not Africa's Sun:
All EW Lights are designed for the 30°C Reality. Minimum.

