

LEDrail 2000 Pro

Retail

P2000 Not included

P2000 LED conversion kit that's positively magnetic.

IP 40

Designed specifically for slick and quick attachment to P2000 trunking thanks to its patented magnetic mounting plates the ledrail 2000 offers clean lines, cost effective installation and the ability to install in both continuous runs or staggered distributions with ease.



SPEC SHEET

LEDrail 2000 104

KEY FEATURES

Raw Lumen:	4240 lm	5840 lm	6888 lm
Effective Lumen:	3116 lm	4300 lm	4984 lm
240V:	24W	32W	41W
Raw Efficacy:	177 lm/w	183 lm/w	167 lm/w
Effective Efficacy:	130 lm/w	134 lm/w	121 lm/w
Max Ta:	30°C	30°C	30°C
L&B:	L80 B10 70 000 Hrs	L80 B10 70 000 Hrs	L80 B10 70 000 Hrs

MODULAR

- With extra Lumen Packages up to 14,900 lm.

DIFFUSER

- For a harmonious band of soft light.

5 SIZE OPTIONS

- LEDrail 2000 104
- LEDrail 2000 106
- LEDrail 2000 108
- LEDrail 2000 110
- LEDrail 2000 206 (double)

MOUNTING OPTIONS

- P2000 mount



Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



Fitting Length: **1150 x 45mm** See our full brochure for other sizes and specifications.



kV Protection: 1kV-2kV. 4kV or 10kV on request



5000K standard 3000K, 4000K, 6500K available CR>80 R9>13



IP Rating: Indoor



Modular: Expandable system



Acrylic Diffuser




Recyclable



Optional: Bluetooth, Wifi, Dali & Bi Level

Distribution

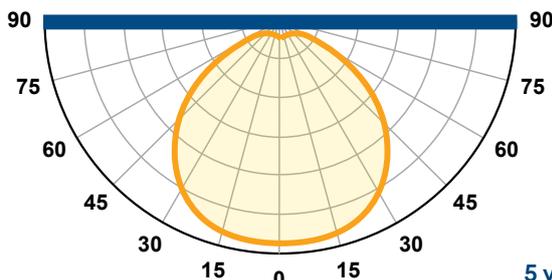

Wide Frosted

Designed and Manufactured by

energywise

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubsesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

5 year warranty: Please visit www.energywise.co.za T's & C's apply



SABS APPROVED



MADE IN SOUTH AFRICA