


LO-BOX

Tough on the outside, stunning on the inside.

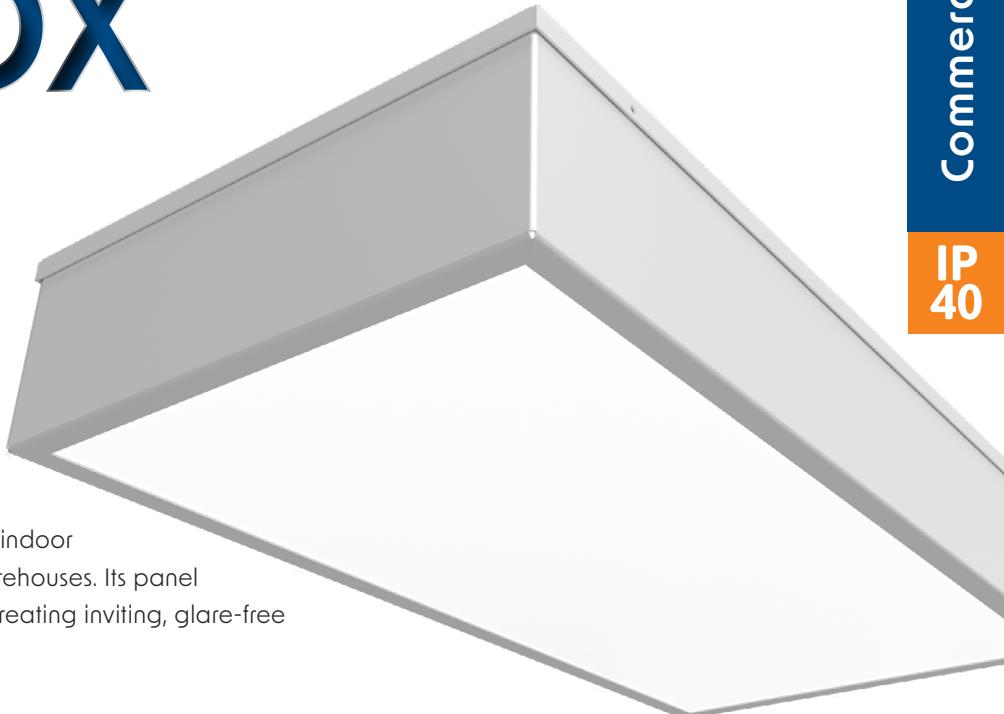

LO-BOX brings smooth, even illumination to indoor spaces like gyms, showrooms, and small warehouses. Its panel diffuser softens light for comfort and clarity, creating inviting, glare-free environments.

SPEC SHEET

LOBOX BAY

402

Raw Lumen:
Effective Lumen:

16 352 lm
11 000 lm

Wattage:
Raw Efficacy:
Effective Efficacy:

95W
172 lm/w
116 lm/w

Max Ta:
L&B:
Hrs:

35°C
L80 B10
75 000 hrs

Dimensions:

630 x 350mm



5 or 7 year warranty:
Please visit
www.energylights.co.za
*T's & C's Apply

302

16 350 lm
11 148 lm

91W
180 lm/w
123 lm/w

35°C
L90 B10
90 000 hrs

630 x 350mm

KEY FEATURES

MODULAR

- The fitting can reach a max lumen package of 11,150 effective lumen.

3 SIZE OPTIONS

- LO-BOX 402
- LO-BOX 302



DIFFUSER

- PMMA Acrylic glass (Perspex)

TEMPERATURE

- Ambient room temperature: minimum 35°C

MOUNTING OPTIONS

- Mounted directly on the ceiling, suspended or on P2000 using a bracket (Available as an add-on).

Designed and
Manufactured by

energylights®


Better Light
Through Research.

sales@energylights.co.za | www.energylights.co.za
T: +27 31 764 2345 / +27 87 941 0012

Physical address:

Unit 5 Edstan Business Park, 2 Ibhubesi Road,
Riverhorse Valley, Durban, South Africa, 4017.
Postal address: PO Box 1166, Kloof, South Africa, 3640

Distribution Options

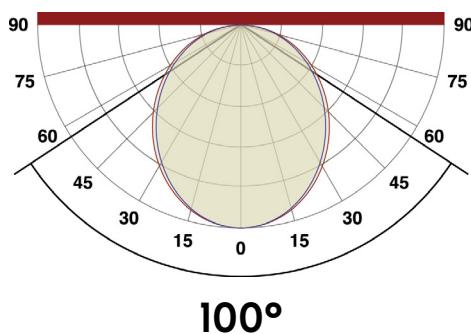

4kV

kV Protection:
4kV surge
protection



KELVIN

5000K standard
3000K, 4000K,
6500K available
CR>80 R9>13



IP 40

IP Rating:
Indoor



L&B

L&B Rating:
L80 B10
90 000 hrs



**Sustainably
Recyclable:**
Environmental
Friendly



Optional:
Bluetooth, Wifi,
Dali 2 & Bi Level



CRI
Colour
Rendition
Index:
80+



PMMA
Lenses
Acrylic Panel
Diffuser

5 year warranty:

Please visit www.energylights.co.za

 **MADE IN
SOUTH AFRICA**