

# LEDrail 2000

P2000 Not included

## P2000 LED conversion kit that's positively magnetic.



Designed specifically for slick and quick attachment to P2000 trunking thanks to its patented magnetic mounting plates the ledrail 2000 offers clean lines, cost effective installation and the ability to install in both continuous runs or staggered distributions with ease.

### SPEC SHEET

### LEDrail 2000 104

### KEY FEATURES

Raw Lumen:	4240 lm	5840 lm	6888 lm
Effective Lumen:	3116 lm	4300 lm	4984 lm
<b>240V:</b>	<b>24W</b>	<b>32W</b>	<b>41W</b>
Raw Efficacy:	177 lm/w	183 lm/w	167 lm/w
Effective Efficacy:	130 lm/w	134 lm/w	121 lm/w
<b>Max Ta:</b>	<b>35°C</b>	<b>35°C</b>	<b>35°C</b>
L&B:	L80/90 B10 F10 70K hrs	L80/90 B10 F10 70K hrs	L80 B10 F10 70K hrs

### MODULAR

- With extra Lumen Packages up to 16900 lm.

### DIFFUSER


- For a harmonious band of soft light.

### 5 SIZE OPTIONS

- LEDrail 2000 104
- LEDrail 2000 106
- LEDrail 2000 108
- LEDrail 2000 110
- LEDrail 2000 206 (double)

### MOUNTING OPTIONS

- P2000 mount

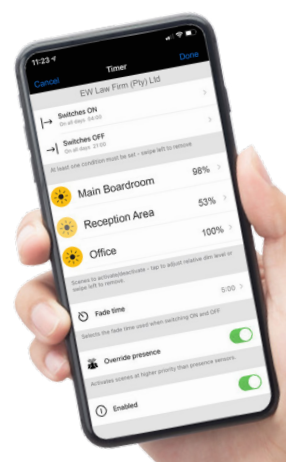

Fitting Length: **1150mm**

See our full brochure for other sizes and specifications.

**4kV**  
kV Protection: 1kV-2kV, 4kV or 10kV on request

**KELVIN**  
5000K standard  
3000K, 4000K, 6500K available  
CR>80 R9>13

**IP 40**  
IP Rating: Indoor

**Modular:**  
Expandable system

**Optional:** Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.

**PMMA**  
Acrylic Diffuser

**Recyclable**

**Optional:**  
Bluetooth, Wifi, Dali & Bi Level




GET IT ON

Download on the

\*25°C is for Textbooks, Not Africa's Sun: All EW Lights are designed for the 35°C Reality.

**Distribution**

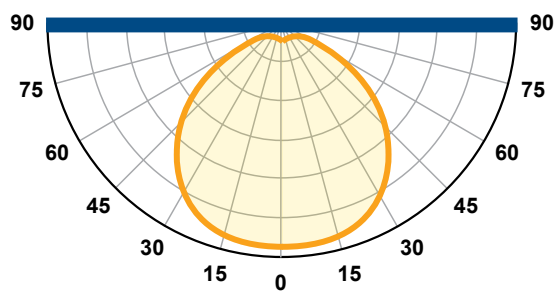

**120° Diffuser**

Designed and Manufactured by

**energywise**

Better Light Through Research.

sales@energywise.co.za | www.energywise.co.za  
 T: +27 31 764 2345 / +27 87 941 0012  
 Physical address: Unit 5 Edstan Business Park, 2 Ibhubsesi Road, Riverhorse Valley, Durban, South Africa, 4017  
 Postal address: PO Box 1166, Kloof, South Africa, 3640