

LEDrail 4100 IP65

Retail

IP 65

A wolf in sheep's clothing.

Designed to retain the aesthetic of the LEDrail 4100 systems but take the punch of IP65 environment the aptly named LEDrail 4100 IP65 features a resilient and sealed tubular fitting recessed into our patented LEDrail 4100 trunking for those areas such as bakeries where the ability to take a thermal knock and keep on ticking is vital.



SPEC SHEET

LEDrail 4100 110

KEY FEATURES

Raw Lumen:	10,600 lm	14,600 lm	17,560 lm
Effective Lumen:	9430 lm	12,785 lm	15,005 lm
240V:	59W	84W	103W
Raw Efficacy:	180 lm/w	174 lm/w	172 lm/w
Effective Efficacy:	160 lm/w	152 lm/w	147 lm/w
Max Ta:	40°C	40°C	40°C
L&B:	L80 B10 35°C 100K hrs	L80 B20 35°C 100K hrs	L80 B50 35°C 100K hrs

MODULAR

- With extra Lumen Packages up to 21 000 lm.

LENSES


- 8 different acrylic lenses for countless optic combinations

5 SIZE OPTIONS

- LEDrail 4100 IP65 102 560mm
- LEDrail 4100 IP65 104 1400mm
- LEDrail 4100 IP65 106 1700mm
- LEDrail 4100 IP65 108 2350mm
- LEDrail 4100 IP65 110 2800mm

MOUNTING OPTIONS

- P2000 Compatible
- Pendant
- Floating
- Recessed

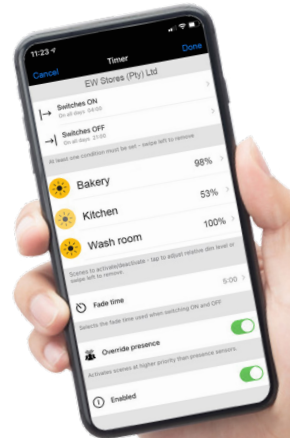

Optional: Bluetooth, Wifi, Dali & Bi Level. Casambi App featured above.



*25°C is for Textbooks, Not Africa's Sun:
All EW Lights are designed for the 35°C Reality.

Designed and
Manufactured by

energywise

Better Light
Through Research.

sales@energywise.co.za | www.energywise.co.za

T: +27 31 764 2345 / +27 87 941 0012

Physical address: Unit 5 Edstan Business Park, 2 Ibhubsesi Road, Riverhorse Valley, Durban, South Africa, 4017

Postal address: PO Box 1166, Kloof, South Africa, 3640

*5 year warranty:
Please visit
www.energywise.co.za



Fitting Length: **2813mm**

See our full brochure for other sizes and specifications.



kV Protection:
1kV-2kV.
4kV or 10kV on request



Colour Temp:
3000, 4000,
5600K
CR>80 R9>13



IP Rating:
Indoor



Modular:
Expandable system



Recyclable




Housing Diffuser:
Polycarbonate



P2000 Mount



Distribution Option

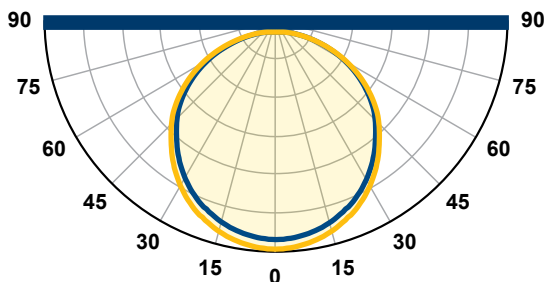

90° Diffused